

NOX
P R I M E

Natural Ground



ECOLAY+ Plank

Dimension: 180 x 1.201mm | Total Thickness: 5mm



ECOLAY PLANK / NLP - 4501



ECOLAY PLANK / NLP - 5510



ECOLAY PLANK / NLP - 6602



ECOLAY PLANK / NLP - 6902



Hospitality & Health care Ecolay+ Plank NLP-4501


Plank
Grande size of wood plank with rich and versatile look



PLANK

Heavy Commercial Grade

Dimension: 914,4 x 914,4mm | Total Thickness: 5mm

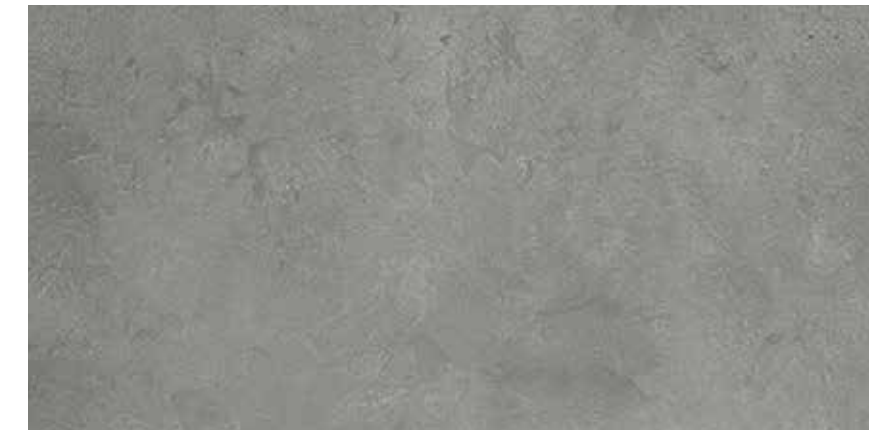

GRANDE TILE / NLI - 1010



GRANDE TILE / NLI - 1011



GRANDE TILE / NLI - 2302



GRANDE TILE / NLI - 2301

Grande ECOLAY+ Tile



Restaurant Grande Ecolay+ Tile NLI-1011

Tile
Unique size options of concrete and stone tile bringing a sense of elegance



TILE

Heavy Commercial Grade

Specifications

With NOX Ecotecture® Technology


NOX corporation, one of the world-largest LVT manufacturers, traces its roots to chemical engineering with expertise in core components of LVT flooring for more than 45 years. Its NOX ECOTECTURE® TECHNOLOGY is the foundation of **ECOLAY+** innovation, providing the most stable and eco-friendly products.

Proven innovation of ECOLAY+ since 2003

Distinguished NOX Ecotecture® Multi-Layer Property ensures the unparalleled dimensional stability and extra sound absorption of **ECOLAY+**

ECOLAY+ Non-skid backing

ECOLAY+ can be supplied with non-skid backing type according to your request.

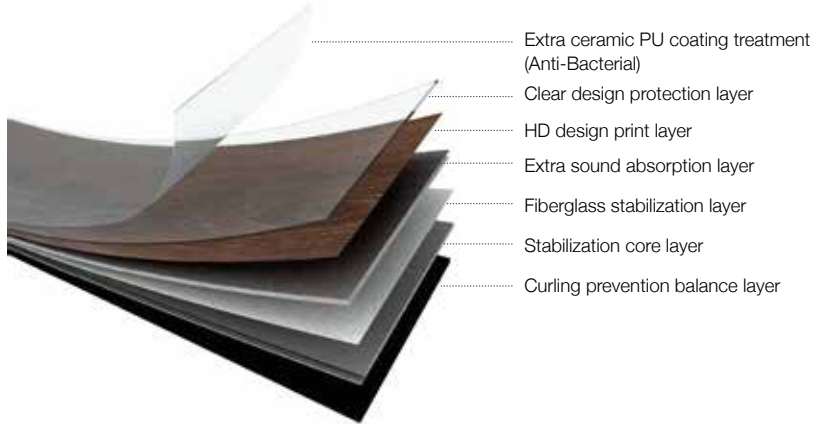

Rooted in a chemical engineering company, NOX corporation was founded in 1994, focusing on Luxury Vinyl Tile Flooring innovation, design and manufacturing for global customers.

We are the first and only LVT manufacturer producing not only superior quality in our finished product but in all the components.



Installation Guidelines

- Prior to installation, the subfloor must be heated for -14 days if heating is available, and if not, allow sufficient time to dry out completely.
- Room temperature must be maintained at 18°C or higher before and during installation.
- The flooring must be allowed to acclimate in the room to be installed for a minimum of 24 hours and be stacked flat on the floor to avoid bending the floor
- Prior to installation, please ensure that both color and lot# are the same.
- When installing **ECOLAY+**, be sure to keep dust, dirt or foreign particles away from the locking strip.


Maintenance

- Regularly sweep floor to remove sand and grit that can scratch floor.
- For best results, use only water with a mop. Avoid flooding the floor with too much water.
- For heavily soiled areas, use a neutral ph balanced floor cleaner
- Use caution when lifting boxes.
- Promptly remove any standing water to avoid slippage.
- Keep **ECOLAY+** on the flat surface to keep it from warping

Test Result

Test Item	Standard	Ecology+ / Ecoclock+
Level of use	EN 685	23 / 33 / 42
Dimensional stability	ISO 23999 / EN 434	<0.10% (Norm: <0.25%)
Abrasion group	EN 660-2	Class T
Castor chair resistance	EN 425	No damage
Squareness & Straightness	ISO 24342	≤400mm : ≤0.25mm
	ASTM F2055	>400mm : ≤0.35mm
Residual indentation	EN 433	≤0.1 mm
	ASTM F1914	<8%
Impact sound insulation	ISO 10140-3	9dB
Light fastness	ISO 105-B02	≥6
Slip resistance	EN 13893	DS
	DIN51130	R10
Resistance to chemicals	ISO 26987	No Defects
	ASTM F925	No Defects
Thermal resistance	ISO 8302	0.01 m2K/W
Curling after exposure to heat	ISO 23999	≤2mm
Fire resistance	EN 13501-1	Bfl -s1
Flexibility	ISO 24344	Passed
	ASTM F137	Passed
Body Voltage	EN 1815	<2kV
Resistance against staining	ISO 26987	Passed
Underfloor heating suitability	EN 12524	Suitable
Formaldehyde group	EN 717-1	E1
Indoor air quality		Low VOC

ECOLAY+
EASIEST & STRONGEST GLUELESS LVT - LVP



NOX
NOX Corp.
www.noxprime.com



AGK YER KAPLAMALARI PAZARLAMA LTD.
İSTANBUL: Göztepe Mah. Göksu Evleri Sit. Akkavak Cad.
B145B 18 No'lu Villa 34815 Anadoluhisari Beykoz
Tel:(216) 463 19 12 Fax:(216) 463 19 15
İZMİR: Şair Eşref Bulvarı No:22/802 35230 Çankaya
Tel:(232) 483 50 63 Fax:(232) 483 02 35
ANKARA: Şehit Kurbanı Akboğa Sok. No:17/2 06610 Birlik
Tel:(312) 495 72 57 Fax:(312) 495 72 45 GSM:(532) 326 94 87
info@agk.com.tr www.agk.com.tr

0800 ALO HALI • 0544 AGK HALI • 0544 ALO HALI